

ADDITIVE MANUFACTURING POWDER

M789 AMPO / FE-BASED ALLOYS

Available Product Variants

15 - 45 µm

45 - 90 µm

Product Description

BÖHLER M789 AMPO is a newly developed maraging steel, which combines the mechanical properties of 1.2709 with the corrosion resistance of 17-4PH. This patent bending grade can easily be printed without any preheating and achieves a hardness of about 52 HRC with a very easy heat treatment. Furthermore, this material shows an excellent polishability, which makes it the ideal choice for inserts with conformal cooling in plastic injection molding and in any other application where a high hardness and corrosion resistance is of need.

Process Melting

VIGA

Properties

- > Toughness & Ductility : high
- > Wear Resistance : good
- > Machinability : very high
- > Dimensional stability : very high
- > Polishability : very high
- > Corrosion resistance : very high
- > Micro-cleanliness : very high

Applications

- > 3D Printing - direct metal deposition
- > Automotive Racing
- > Components for Displays
- > Lamps/Lenses for Automotive
- > Plastic Extrusion
- > Wind Power
- > 3D Printing - selective laser melting
- > Camera lenses
- > Consumer Goods - General
- > Mechanical Engineering
- > Powder for additive manufacturing
- > Hotrunner systems
- > Automotive
- > Civil and mechanical engineering
- > Injection Molding
- > Other Components
- > Tool Holders (milling, drilling, turning & chucks)

Technical data

Material designation	
BÖHLER patent	Market grade

Chemical composition (wt. %)

C	Cr	Mo	Ni	Ti	Al
< 0,02	12.2	1	10	1	0.6

Powder Properties

Particle Size Distribution 15-45µm*			
Typical Values	D10	D50	D90
[µm]	18-24	29-35	42-50

* Measurement of particle size distribution is based on ISO 13322-2 (Dynamic image analysis methods);


Apparent density**	min. 3.5 g/cm ³
--------------------	----------------------------

** Flowability and apparent density are based on DIN EN ISO 4490 resp. DIN EN ISO 3923-1.

Mechanical Properties

With according Heat Treatment	
Tensile strength (Rm) (MPa ksi)	1,800 to 1,900 262 to 276
Yield strength (Rp _{0.2}) (MPa ksi)	1,670 to 1,770 243 to 257
Elongation (%)	4 to 8
Hardness (HRC)	51 to 53
Impact Toughness (ISO-V) (J)	6 to 14

Tempering chart

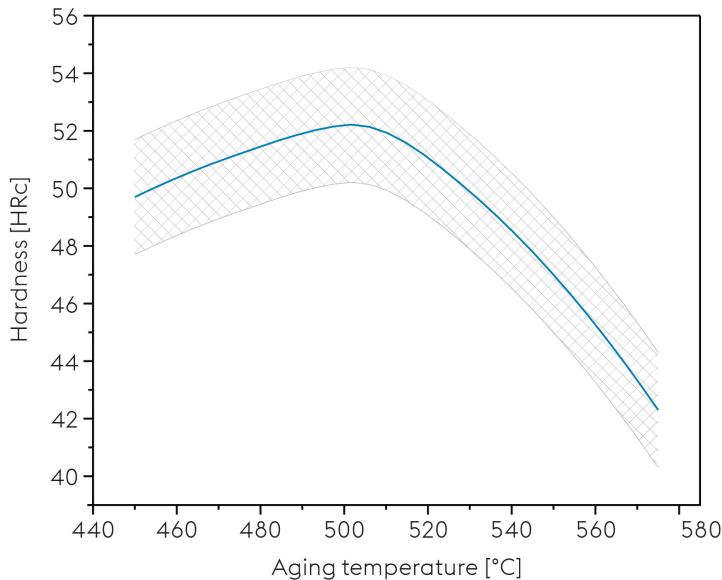

Heat Treatment for optimum properties:
Solution Annealing: 1000°C / 1h soaking time / air cooling to room temperature
Ageing: 500°C / 3h soaking time / air cooling

For more information see <https://www.voestalpine.com/boehler-edelstahl/de/>

The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.